



RB(YX)-21D

型号	频率	功率	额定电压	电流	最大流量	额定真空	额定压力	噪音	重量	进出口径
Type	Frequency	Power	Rated Voltage	Rated Current	Air Flow (max)	Rated Vacuum	Rated Pressure	Noise Level	Weight	In/out
RB-21D-A1	Hz	Kw	V	A	m³/h	mbar	mbar	dB(A)	Kg	Let
	50	0.25	220-240V	1.6	80	-100	110	53	9	PF 1.25"
RB-21D-A2	60	0.28	220-240V	1.9	98	-110	110	56	11	PF 1.25"
	50	0.4	220-240V	2.7	80	-120	130	53		
RB-21D-1	60	0.5	220-240V	3.2	98	-150	160	56		
	50	0.25	200-240△ 345-415Y	2.1△/1.2Y	80	-100	110	53	8	PF 1.25"
RB-21D-2	60	0.29	220-275△ 380-480Y	2.0△/1.15Y	98	-110	110	56		
	50	0.4	200-240△ 345-415Y	2.6△/1.5Y	80	-120	130	53	10	PF 1.25"
	60	0.5	220-275△ 380-480Y	2.6△/1.5Y	98	-150	160	56		

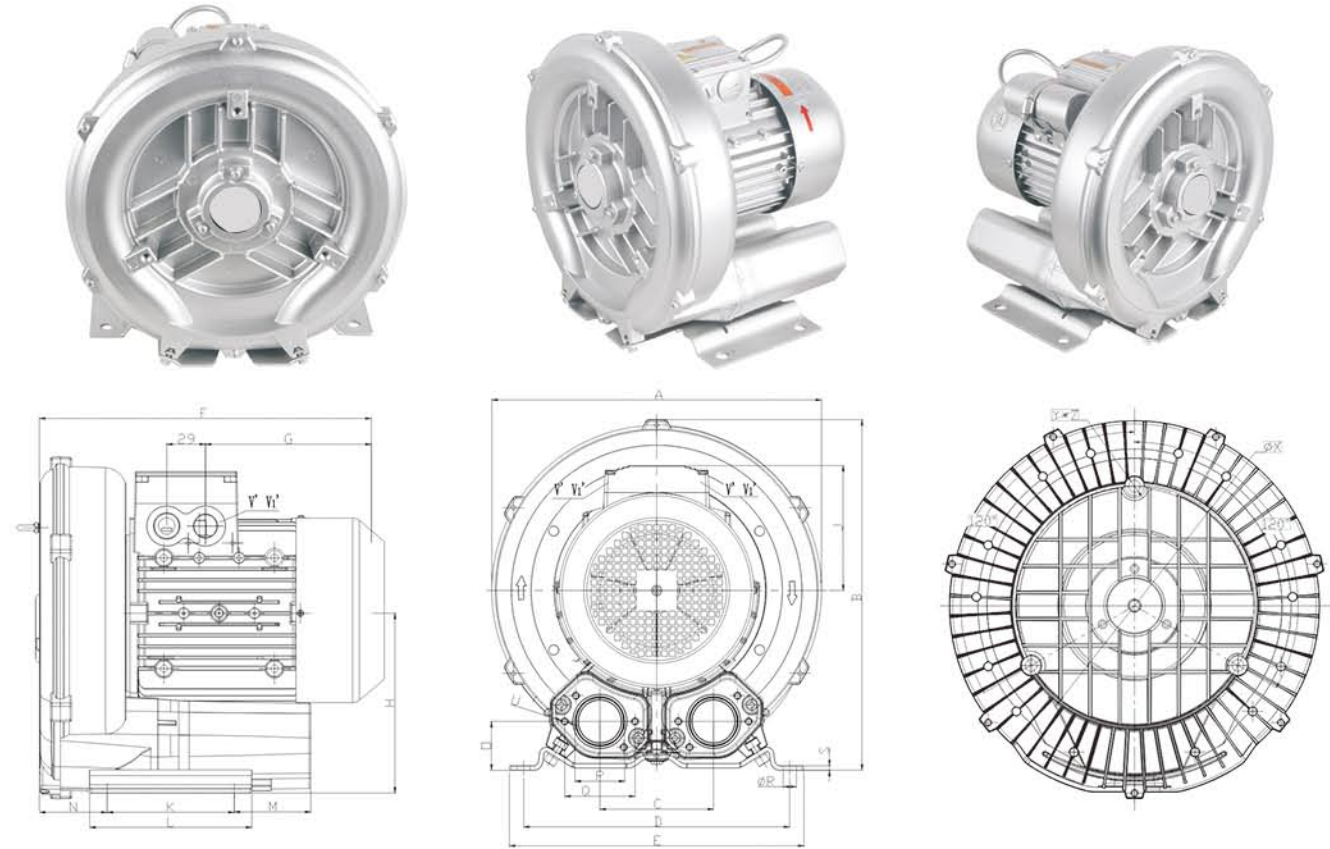


Type	Phases	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	Q	φR	S	U	V[1-]	V[1-]	V[3-]	V[3-]	YxZ	X-Bohrungen X-Holes	φ x
RB-21D-1	3~	246	247	90	205	230	219	92	128	101	83	108	75	71	39	G1¼(15tief-deep)	64	10	2.5	M6x17	-	-	M25x1.5	M16x1.5	M6x15	0/120/240°	140
2RB-21D-2	3~	246	247	90	205	230	256	135	128	111	83	108	75	71	39	G1¼(15tief-deep)	64	10	2.5	M6x17	-	-	M25x1.5	M16x1.5	M6x15	0/120/240°	140
2RB-21D-A1	1~	246	247	90	205	230	256	135	128	111	83	108	75	71	39	G1¼(15tief-deep)	64	10	2.5	M6x17	M16x1.5	M25x1.5	-	-	M6x15	0/120/240°	140

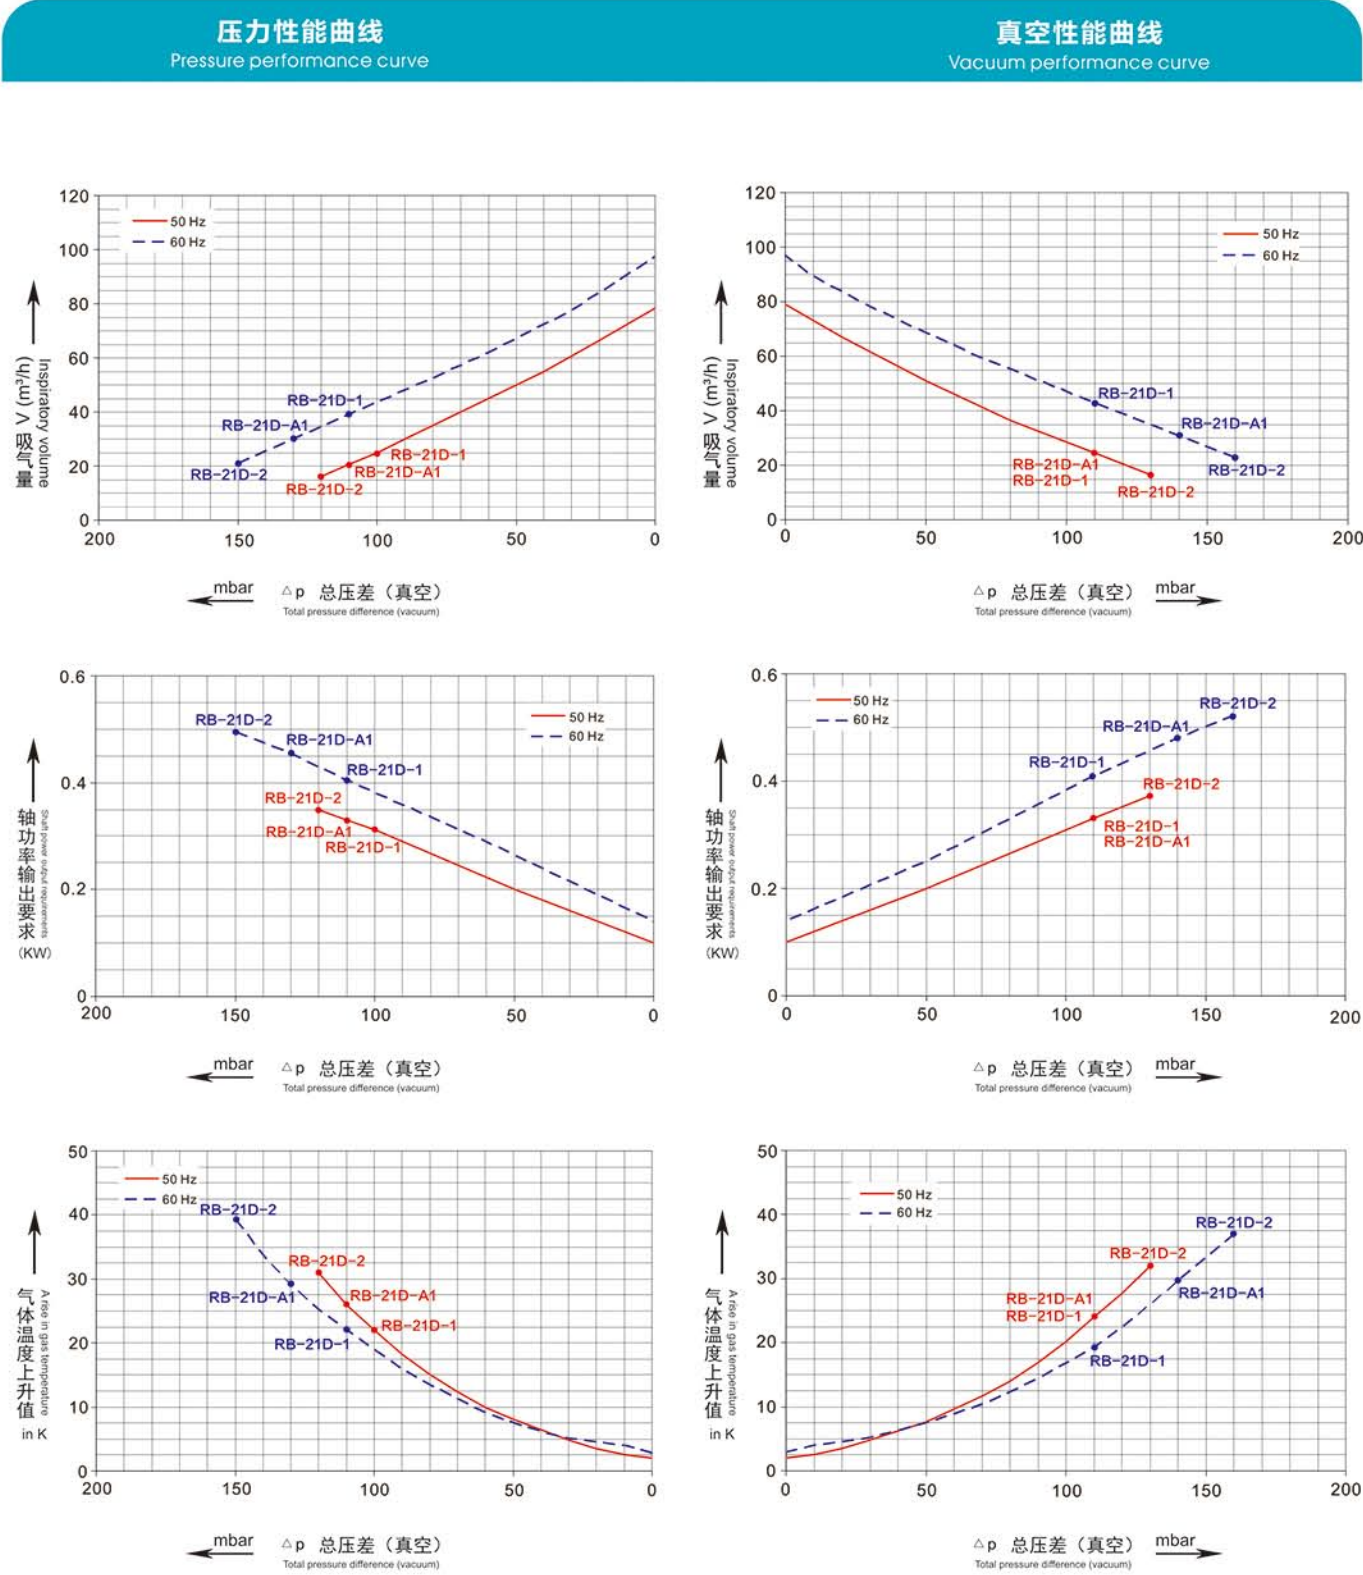


RB(YX)-31D

型号	频率	功率	额定电压	电流	最大流量	额定真空	额定压力	噪音	重量	进出口径
Type	Frequency	Power	Rated Voltage	Rated Current	Air Flow (max)	Rated Vacuum	Rated Pressure	Noise Level	Weight	In/out
	Hz	Kw	V	A	m³/h	mbar	mbar	dB(A)	Kg	Let
RB-31D-A1	50	0.55	220-240V	3.7	95	-120	120	57	12	PF 1.25"
	60	0.62	220-240V	4.9	110	-130	150	60		
RB-31D-A2	50	0.7	220-240V	4.5	100	-150	150	57	13	PF 1.25"
	60	0.83	220-240V	5.6	120	-150	160	60		
RB-31D-1	50	0.55	200-240Δ 345-415Y	2.4Δ/1.7Y	100	-120	130	57	12	PF 1.25"
	60	0.62	220-275Δ 380-480Y	2.6Δ/1.5Y	120	-120	130	60		
RB-31D-2	50	0.7	200-240Δ 345-415Y	3.8Δ/2.2Y	100	-150	150	57	14	PF 1.25"
	60	0.83	220-275Δ 380-480Y	3.75Δ/2.15Y	120	-150	140	60		

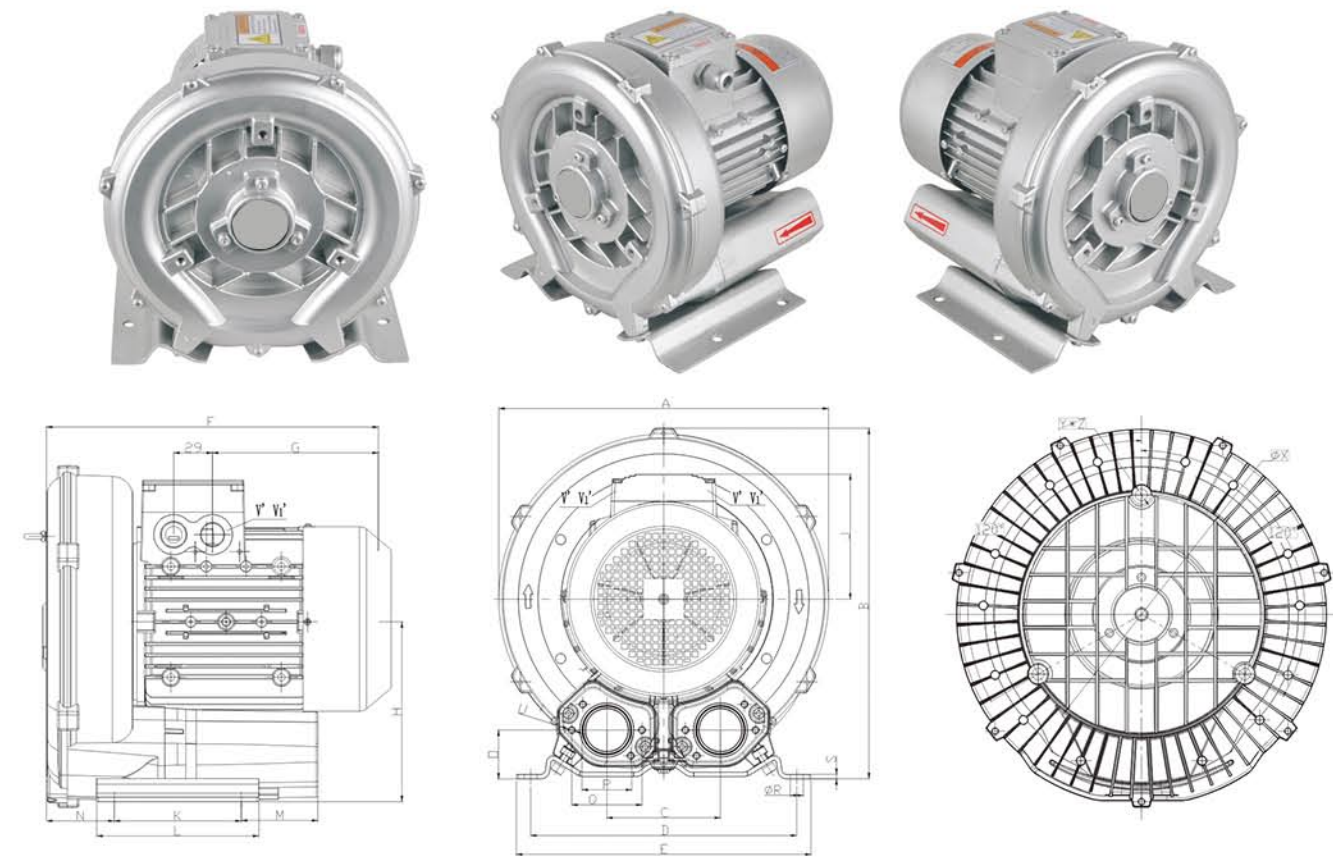




Type	Phases	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	Q	φR	S	U	V(1-)	V(1-)	V(3-)	V(3-)	YxZ	X-Bohrungen X-Holes	φ x
RB-31D-1	3~	268	272	93	205	230	260	135	141	111	83	108	82	69	41	G1¼(15lief-deep)	64	10	2.5	M6x17	-	-	M25x1.5	M16x1.5	M6x15	0/120/240	160
RB-31D-2	3~	268	272	93	205	230	260	135	141	111	83	108	82	69	41	G1¼(15lief-deep)	64	10	2.5	M6x17	-	-	M25x1.5	M16x1.5	M6x15	0/120/240	160
RB-31D-A1	1~	268	272	93	205	230	260	135	141	111	83	108	82	69	41	G1¼(15lief-deep)	64	10	2.5	M6x17	M25x1.5	M16x1.5	-	-	M6x15	0/120/240	160
RB-31D-A2	1~	268	272	93	205	230	260	135	141	111	83	108	82	69	41	G1¼(15lief-deep)	64	10	2.5	M6x17	M16x1.5	M25x1.5	-	-	M6x15	0/120/240	160

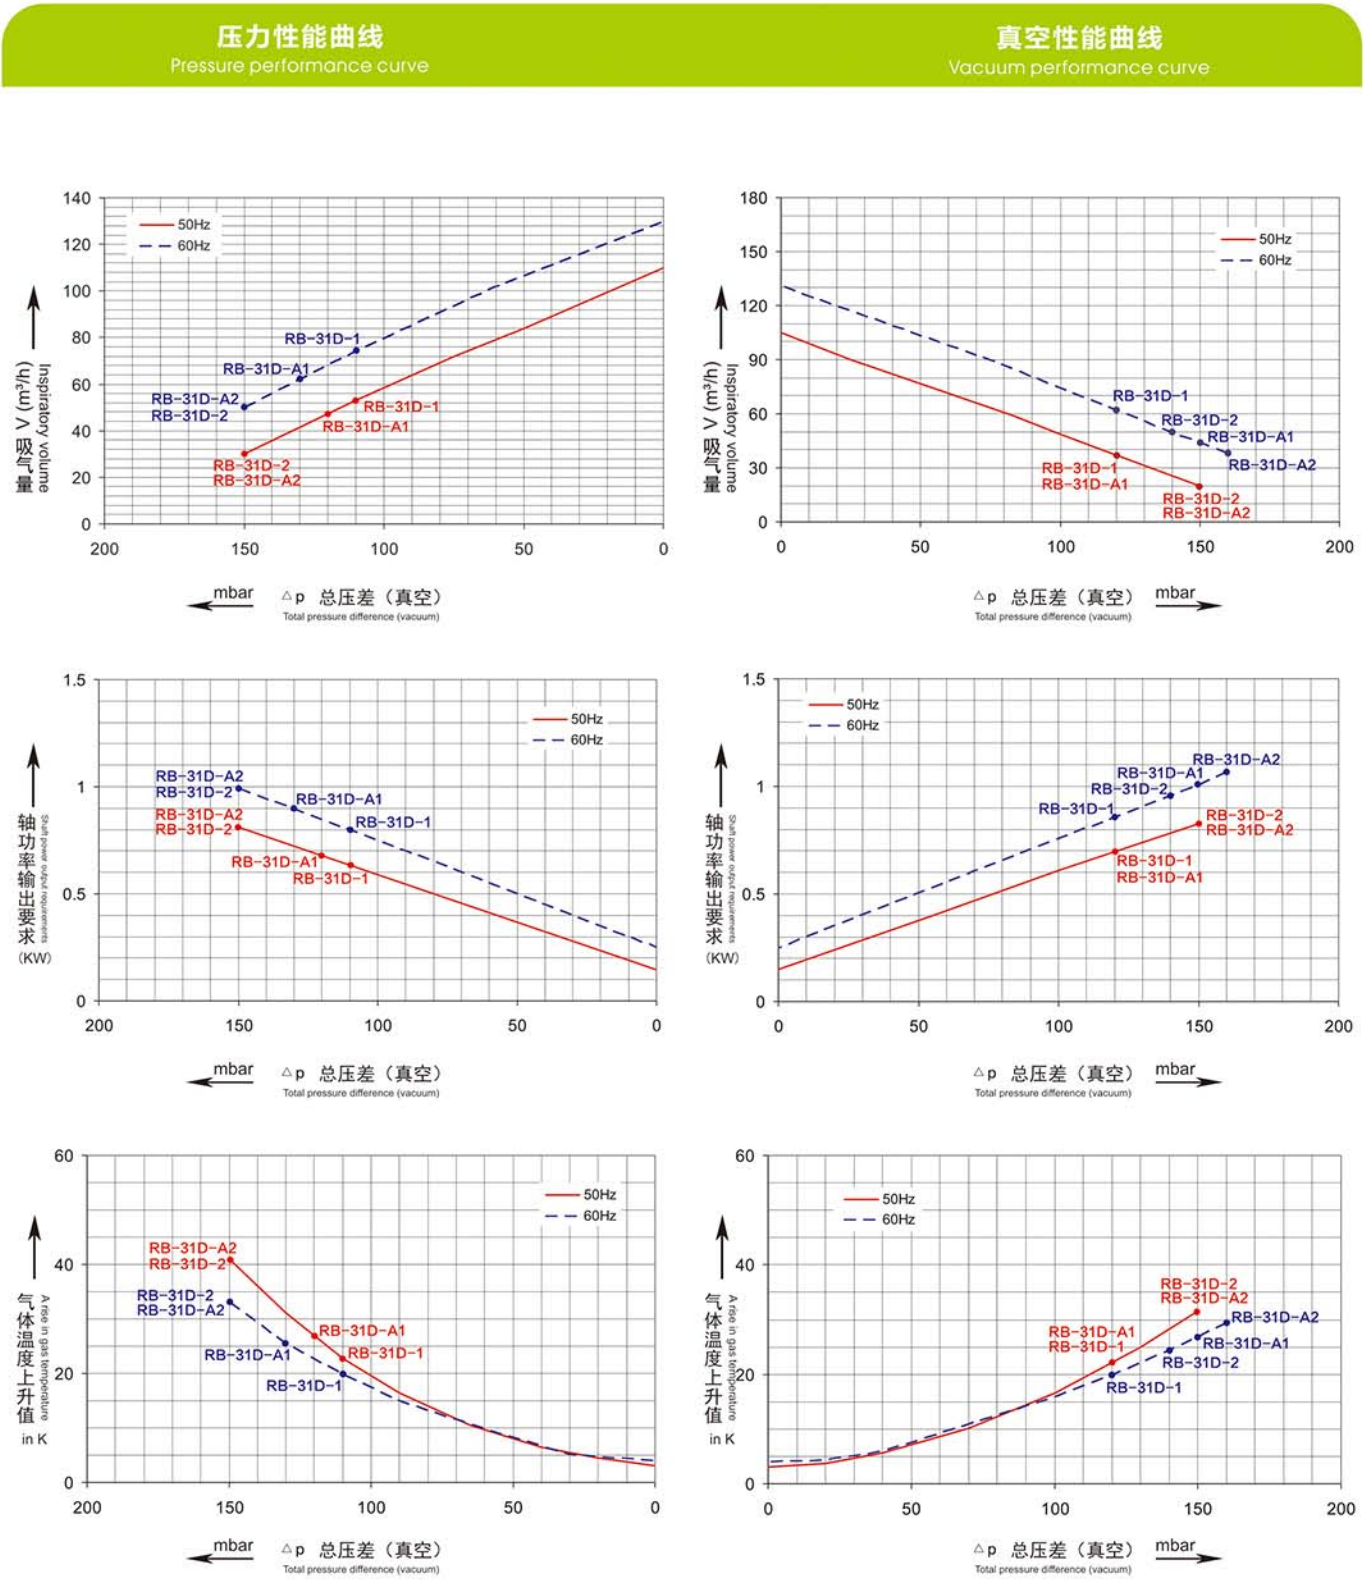

RB(YX)-31D

RB(YX)-41D


型号	频率	功率	额定电压	电流	最大流量	额定真空	额定压力	噪音	重量	进出口径
Type	Frequency	Power	Rated Voltage	Rated Current	Air Flow (max)	Rated Vacuum	Rated Pressure	Noise Level	Weight	In/out
RB-41D-A1	Hz	Kw	V	A	m³/h	mbar	mbar	dB(A)	Kg	Let
	50	0.7	220-240V	4.5	145	-120	120	63	14	PF 1.5"
RB-41D-A2	60	0.83	220-240V	5.6	175	-130	130	64	15	PF 1.5"
	50	0.85	220-240V	5	145	-160	160	63	15	PF 1.5"
RB-41D-A3	60	0.95	220-240V	5.8	175	-160	160	64	15	PF 1.5"
	50	1.3	220-240V	7.3	145	-170	200	63	17	PF 1.5"
RB-41D-1	60	1.5	220-240V	7.8	175	-210	220	64	17	PF 1.5"
	50	0.7	200-240△ 345-415Y	3.8△/2.2Y	145	-120	120	63	14	PF 1.5"
RB-41D-2	60	0.83	220-275△ 380-480Y	3.75△/2.15Y	175	-130	130	64	15	PF 1.5"
	50	0.85	200-240△ 345-415Y	4.2△/2.4Y	145	-160	160	63	15	PF 1.5"
RB-41D-3	60	0.95	220-275△ 380-480Y	4.0△/2.3Y	175	-160	160	64	15	PF 1.5"
	50	1.3	200-240△ 345-415Y	5.7△/3.3Y	145	-170	200	63	16	PF 1.5"
RB-41D-3	60	1.5	220-275△ 380-480Y	6.0△/3.5Y	175	-210	220	64	16	PF 1.5"

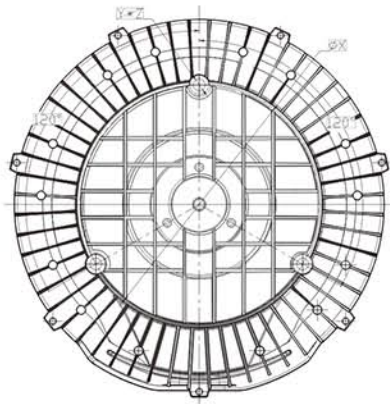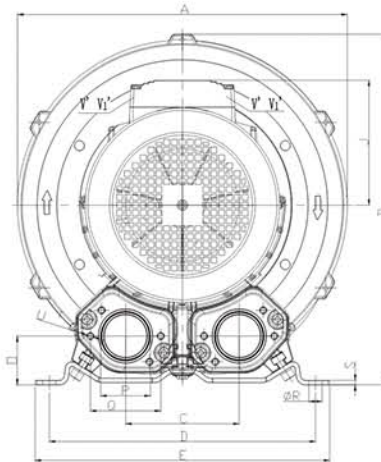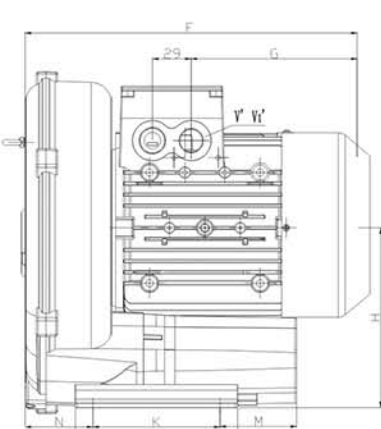

Type	Phases	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	Q	φR	S	U	V(1~)	V(1~)	V(3~)	V(3~)	YZ	X-Bohrungen X-Holes	φ X
RB-41D-A1	1~	286	302	115	225	255	294	160	154	120	95	130	70	75	46	G1½(15tief-deep)	72	12	3	M6x19	M16x1.5	M25x1.5	-	-	M6x15	0/120/240°	174
RB-41D-A2	1~	286	302	115	225	255	294	160	154	120	95	130	70	75	46	G1½(15tief-deep)	72	12	3	M6x19	M16x1.5	M25x1.5	-	-	M6x15	0/120/240°	174
RB-41D-1	3~	286	302	115	225	255	269	135	154	111	95	130	70	75	46	G1½(15tief-deep)	72	12	3	M6x19	-	-	M25x1.5	M16x1.5	M6x15	0/120/240°	174
RB-41D-2	3~	286	302	115	225	255	292	160	154	120	95	130	70	75	46	G1½(15tief-deep)	72	12	3	M6x19	-	-	M25x1.5	M16x1.5	M6x15	0/120/240°	174
RB-41D-3	3~	286	302	115	225	255	292	160	154	120	95	130	70	75	46	G1½(15tief-deep)	72	12	3	M6x19	-	-	M25x1.5	M16x1.5	M6x15	0/120/240°	174






压力性能曲线

Pressure performance curve

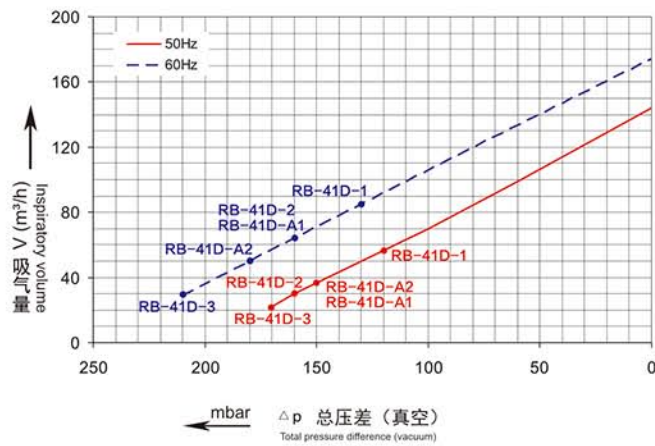




真空性能曲线

Vacuum performance curve

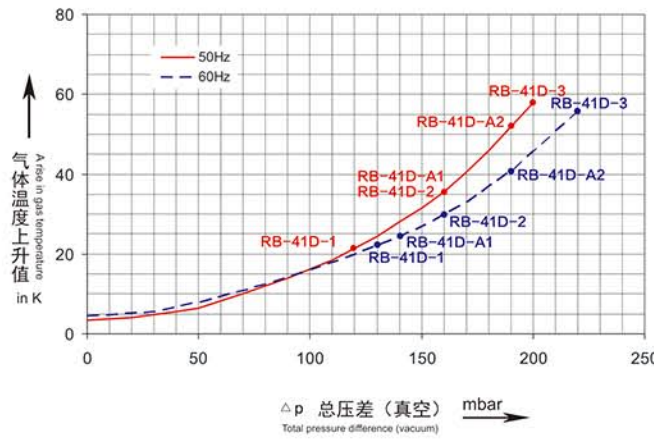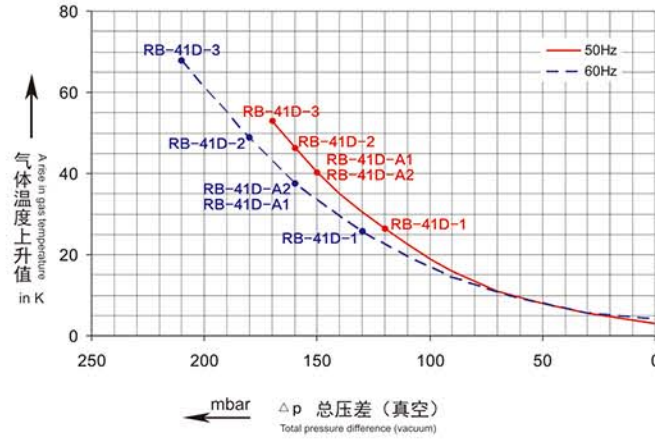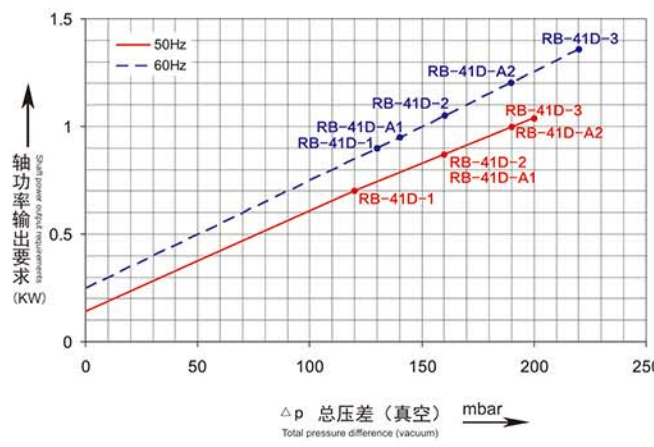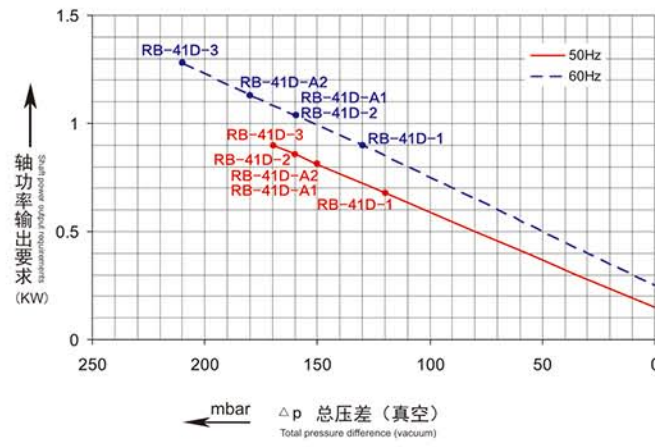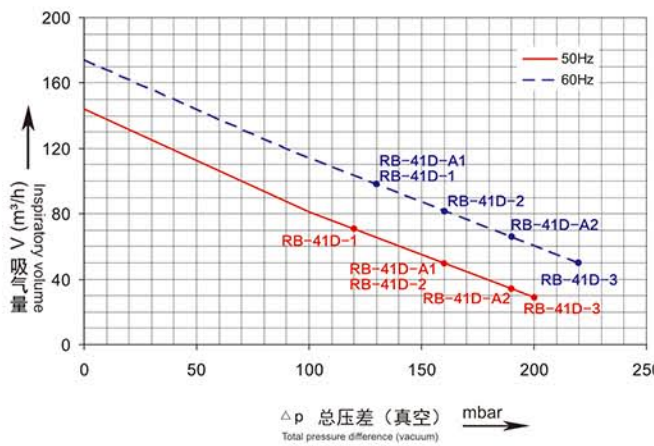

RB (YX) -51D


型号	频率	功率	额定电压	电流	最大流量	额定真空	额定压力	噪音	重量	出入口径
Type	Frequency	Power	Rated Voltage	Rated Current	Air Flow (max)	Rated Vacuum	Rated Pressure	Noise Level	Weight	In/out
	Hz	Kw	V	A	m³/h	mbar	mbar	dB(A)	Kg	Let
RB-51D-A1	50	1.3	220-240V	7.3	210	-160	160	64	22	PF 2.0"
	60	1.5	220-240V	7.5	255	-150	160	70		
RB-51D-A2	50	1.5	220-240V	9	210	-190	200	64	24	PF 2.0"
	60	1.75	220-240V	9.5	255	-180	180	70		
RB-51D-1	50	0.85	200-240△ 345-415Y	4.2△/2.4Y	210	-110	100	64	18	PF 2.0"
	60	0.95	220-275△ 380-480Y	4.0△/2.3Y	255	-80	70	70		
RB-51D-2	50	1.3	200-240△ 345-415Y	6.6△/3.8Y	210	-170	170	64	20	PF 2.0"
	60	1.5	220-275△ 380-480Y	6.9△/4.0Y	255	-150	140	70		
RB-51D-3	50	1.6	200-240△ 345-415Y	7.5△/4.3Y	210	-200	190	64	21	PF 2.0"
	60	2.1	220-275△ 380-480Y	7.6△/4.4Y	255	-220	210	70		
RB-51D-4	50	2.2	200-240△ 345-415Y	9.7△/5.6Y	210	-220	270	64	25	PF 2.0"
	60	2.55	220-275△ 380-480Y	10.3△/6.0Y	255	-260	290	70		

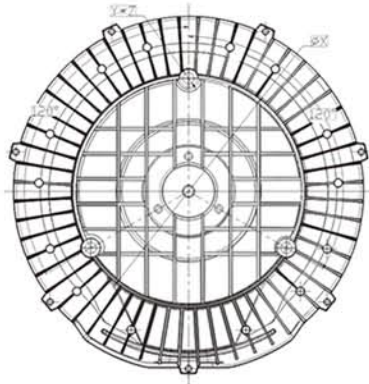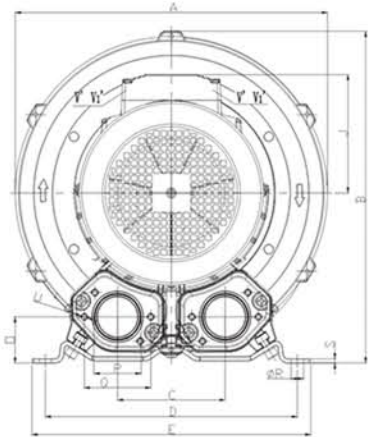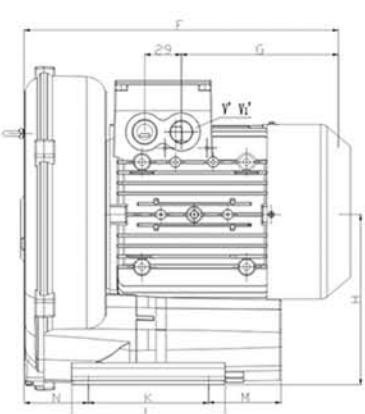

Type	Phases	A	B	C	D	E	F	G	H	J	K	L	M	N	O	φP	Q	φR	S	U	V1-)	V1-)	V1(3-)	V1(3-)	YxZ	X-Bohrungen X-Holes	φX	W
RB-51D-A1	1~	334	337	120	260	295	314	160	175	120	115	155	96	87	48	55	83	14	4	M8x17	M16x1.5	M25x1.5	-	-	M8x20	0/120/240°	200	29
RB-51D-A2	1~	334	337	120	260	295	345	191	175	128	115	155	96	87	48	55	83	14	4	M8x17	M16x1.5	M25x1.5	-	-	M8x20	0/120/240°	200	29
RB-51D-1	3~	334	337	120	260	295	314	160	175	120	115	155	96	87	48	55	83	14	4	M8x17	-	-	M25x1.5	M16x1.5	M8x20	0/120/240°	200	29
RB-51D-2	3~	334	337	120	260	295	314	160	175	120	115	155	96	87	48	55	83	14	4	M8x17	-	-	M25x1.5	M16x1.5	M8x20	0/120/240°	200	29
RB-51D-3	3~	334	337	120	260	295	346	191	175	128	115	155	96	87	48	55	83	14	4	M8x17	-	-	M25x1.5	M16x1.5	M8x20	0/120/240°	200	29
RB-51D-4	3~	334	337	120	260	295	346	191	175	128	115	155	96	87	48	55	83	14	4	M8x17	-	-	M25x1.5	M16x1.5	M8x20	0/120/240°	200	29






压力性能曲线

Pressure performance curve

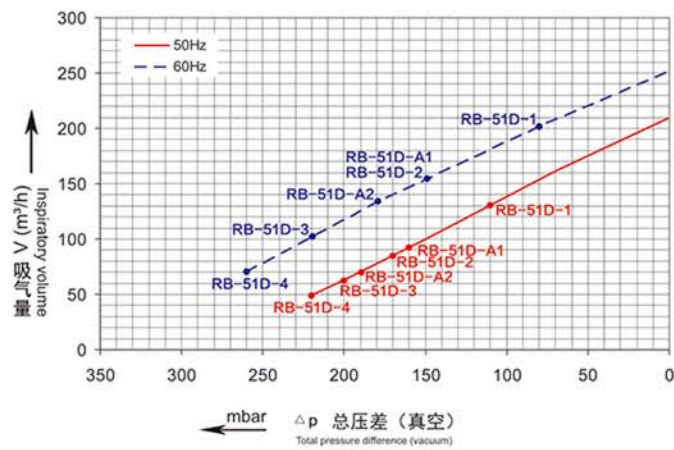




真空性能曲线

Vacuum performance curve

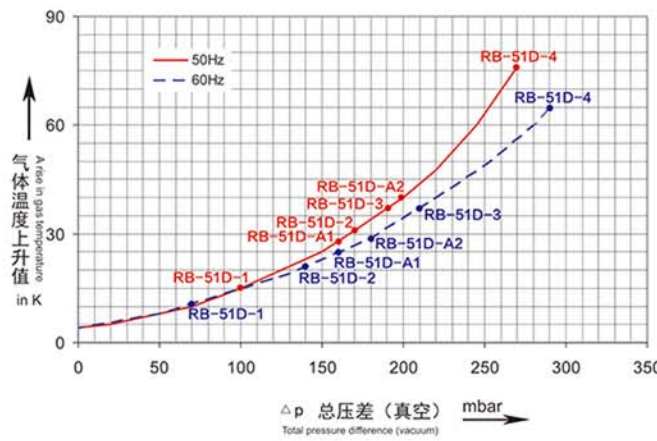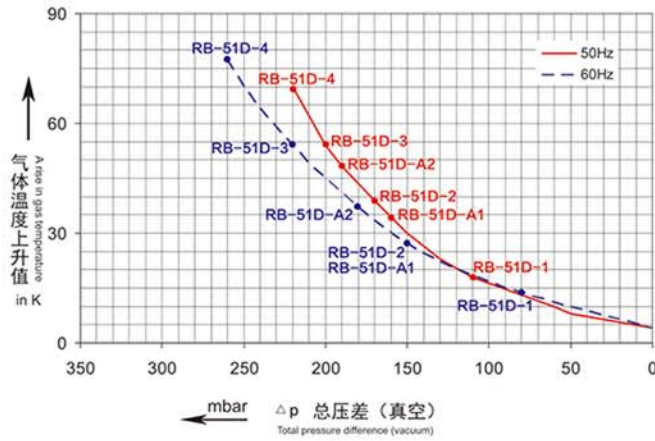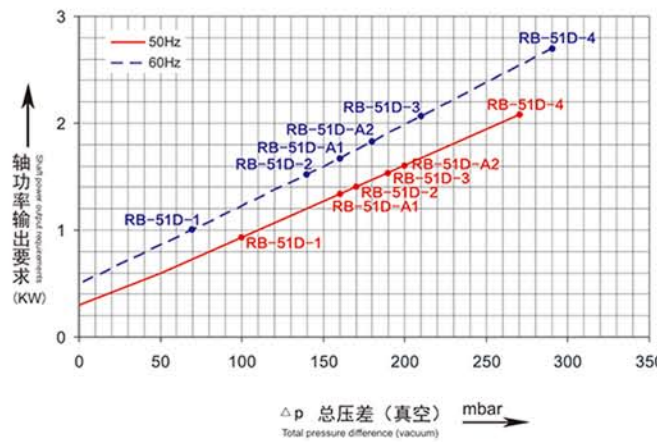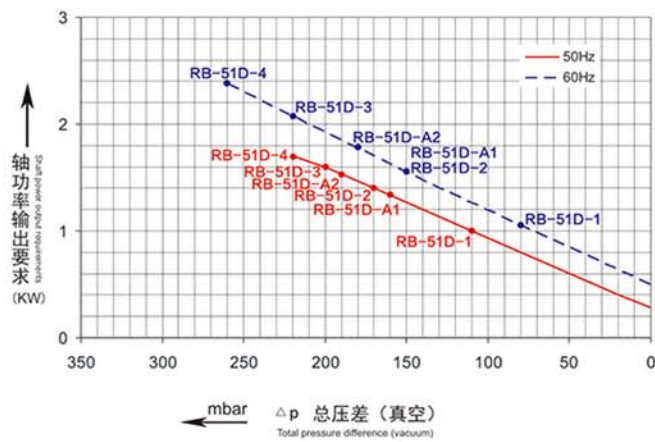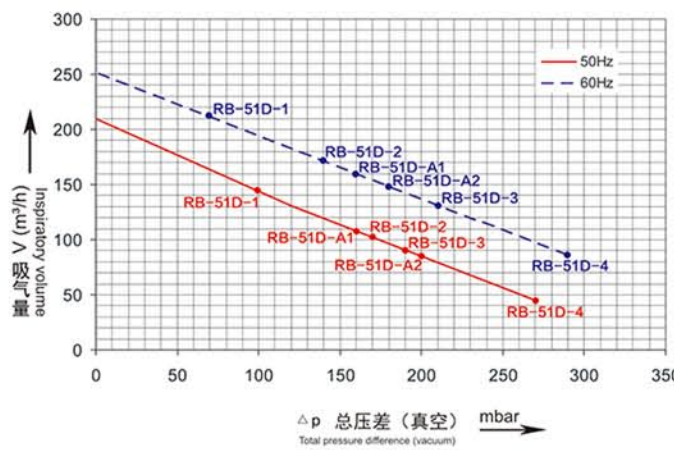

RB (YX) -71D


型号	频率	功率	额定电压	电流	最大流量	额定真空	额定压力	噪音	重量	进出口径
Type	Frequency	Power	Rated Voltage	Rated Current	Air Flow (max)	Rated Vacuum	Rated Pressure	Noise Level	Weight	In/out
	Hz	Kw	V	A	m³/h	mbar	mbar	dB(A)	Kg	Let
RB-71D-1	50	1.6	200-240△ 345-415Y	8.5△/4.9Y	318	-160	150	69	26	PF 2.0"
	60	2.1	220-275△ 380-480Y	8.8△/5.5Y	376	-160	150	72		
RB-71D-2	50	2.2	200-240△ 345-415Y	10△/5.6Y	318	-210	200	69	29	PF 2.0"
	60	2.55	220-275△ 380-480Y	10.3△/6.5Y	376	-210	200	72		
RB-71D-3	50	3	200-240△ 345-415Y	12.5△/7.2Y	318	-270	290	69	34	PF 2.0"
	60	3.45	220-275△ 380-480Y	12.5△/7.3Y	376	-250	230	72		
RB-71D-4	50	4	345-415△ 600-720Y	9.0△/5.2Y	318	-290	330	69	42	PF 2.0"
	60	4.6	380-480△ 660-720Y	9.4△/5.2Y	376	-330	330	72		
RB-71D-A1	50	2.2	230	12.8	318	-190	190	72	30	PF 2.0"
	60	2.55	230	12.8	376	-190	200	74		

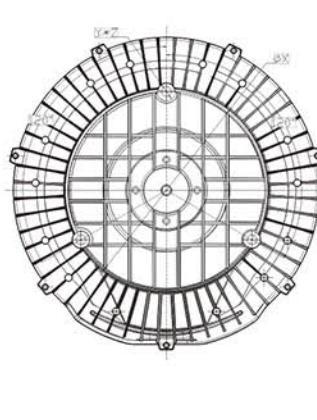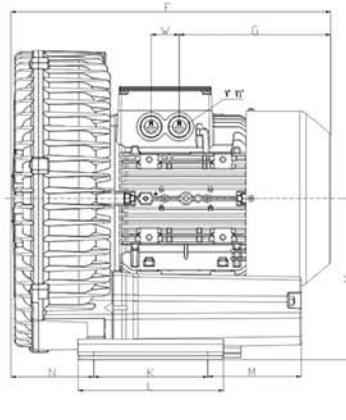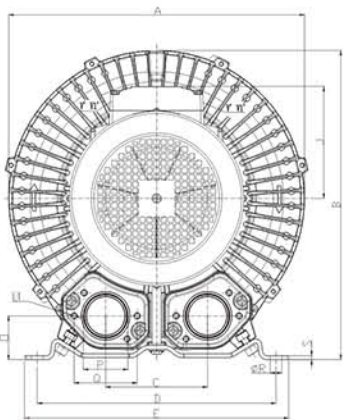

Type	Phases	A	B	C	D	E	F	G	H	J	K	L	M	N	O	φp	φQ	φR	S	U	V1[~]	V1[~]	V1[3~]	V1[3~]	Y/Z	X-Bohrungen X-Holes	φx	W
RB-71D-A1	1~	382	384	125	290	325	403	188	197	128	140	180	84	109	54	55	83	15	4.5	M8x17	M25x1.5	M16x1.5	-	-	M10x20	0/120/240°	240	29
RB-71D-1	3~	382	384	125	290	325	403	191	197	128	140	180	84	109	54	55	83	15	4.5	M8x17	-	-	M25x1.5	M16x1.5	M10x20	0/120/240°	240	29
RB-71D-2	3~	382	384	125	290	325	403	191	197	128	140	180	84	109	54	55	83	15	4.5	M8x17	-	-	-	-	M10x20	0/120/240°	240	29
RB-71D-3	3~	382	384	125	290	325	409	188	197	135	140	180	84	109	54	55	83	15	4.5	M8x17	M32x1.5	M32x1.5	M32x1.5	M32x1.5	M10x20	0/120/240°	240	42
RB-71D-4	3~	382	384	125	290	325	432	209	197	148	140	180	84	109	54	55	83	15	4.5	M8x17	M32x1.5	M32x1.5	M32x1.5	M32x1.5	M10x20	0/120/240°	240	42






压力性能曲线

Pressure performance curve

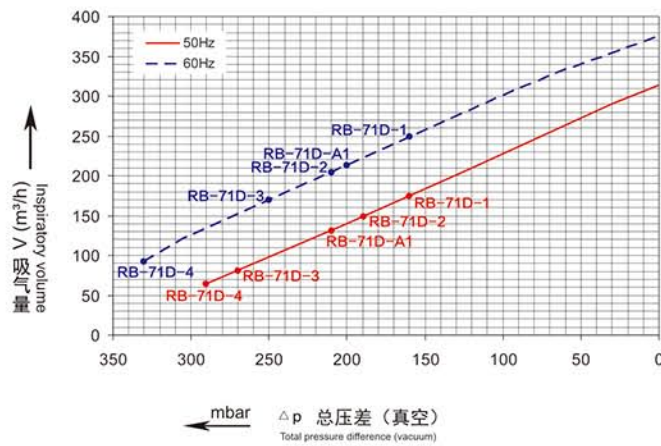




真空性能曲线

Vacuum performance curve

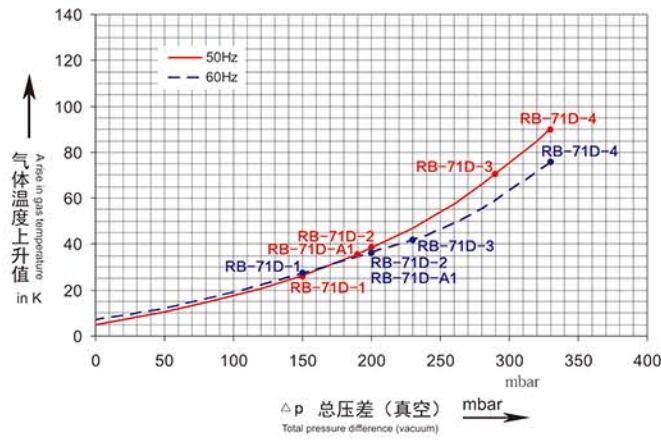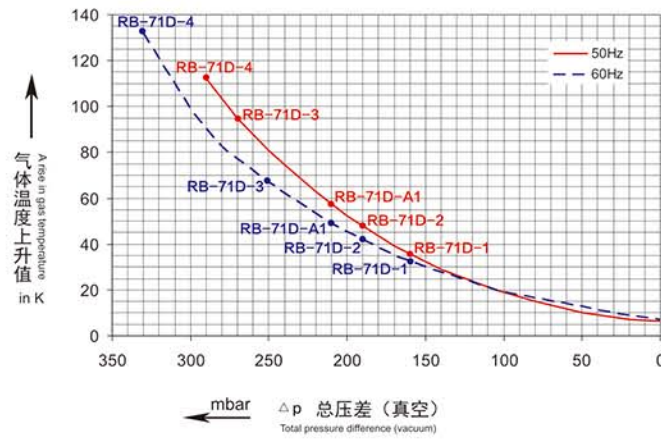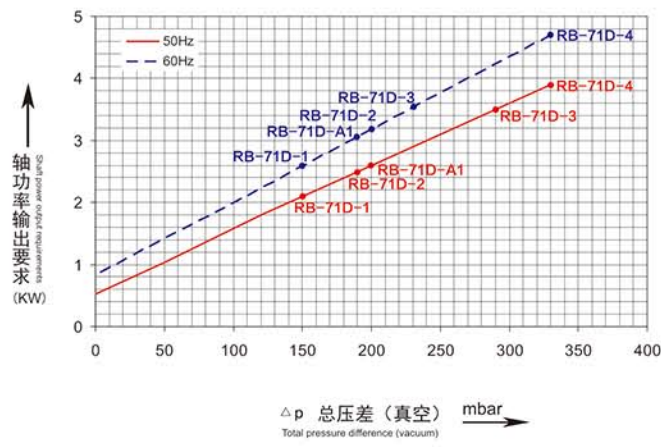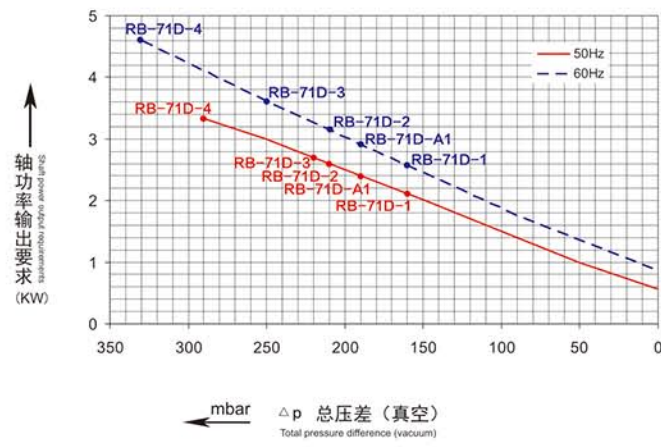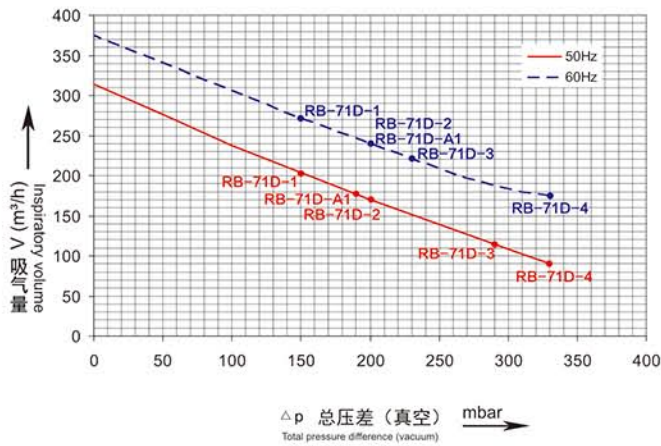

RB(YX)-73D


型号	频率	功率	额定电压	电流	最大流量	额定真空	额定压力	噪音	重量	进出口径
Type	Frequency	Power	Rated Voltage	Rated Current	Air Flow (max)	Rated Vacuum	Rated Pressure	Noise Level	Weight	In/out
	Hz	Kw	V	A	m³/h	mbar	mbar	dB(A)	Kg	Let
RB-73D-1	50	1.6	200-240△ 345-415Y	8.5△/4.9Y	420	-100	100	70	32	PF 2.0"
	60	2.05	220-275△ 380-480Y	8.8△/5.1Y	500	-110	80	73		
RB-73D-2	50	2.2	200-240△ 345-415Y	9.7△/5.6Y	420	-170	170	70	37	PF 2.0"
	60	2.55	220-275△ 380-480Y	10.3△/6.0Y	500	-160	120	73		
RB-73D-3	50	3	200-240△ 345-415Y	12.5△/7.2Y	420	-220	220	70	43	PF 2.0"
	60	3.45	220-275△ 380-480Y	12.6△/7.3Y	500	-200	190	73		
RB-73D-4	50	4	345-415△ 600-720Y	9.0△/5.2Y	420	-260	310	70	43	PF 2.0"
	60	4.6	380-480△ 660-720Y	9.0△/5.2Y	500	-260	280	73		

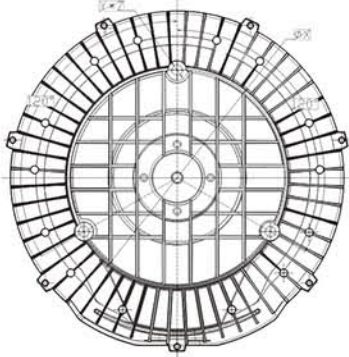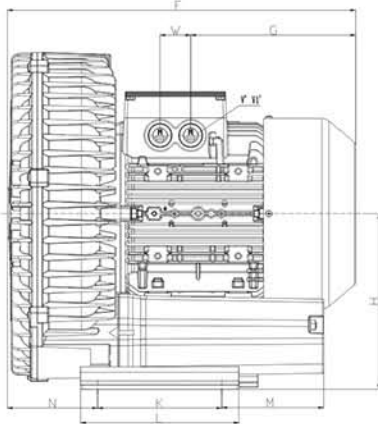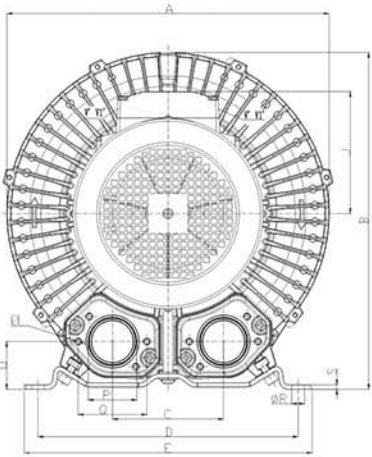

Type	Phases	A	B	C	D	E	F	G	H	J	K	L	M	N	O	ΦP	ΦQ	ΦR	S	U	V(1-)	V(1-)	V(3-)	V(3-)	YxZ	X-Bohrungen X-Holes	ΦX	W
RB-73D-1	3~	360	360	122	284	325	387	191	197	128	140	180	84	109	54	55	83	15	4.5	M8x17	M16x1.5	-	-	-	M10x20	0°/120°/240°	240	29
RB-73D-2	3~	360	360	122	284	325	387	191	197	128	140	180	84	109	54	55	83	15	4.5	M8x17	M16x1.5	-	-	-	M10x20	0°/120°/240°	240	29
RB-73D-3	3~	382	384	125	290	325	419	189	197	135	140	180	84	109	54	55	83	15	4.5	M8x17	M32x1.5	M32x1.5	M32x1.5	M32x1.5	M10x20	0°/120°/240°	240	42
RB-73D-4	3~	382	384	125	290	325	432	209	197	148	140	180	84	109	54	55	83	15	4.5	M8x17	M32x1.5	M32x1.5	M32x1.5	M32x1.5	M10x20	0°/120°/240°	240	42






压力性能曲线

Pressure performance curve

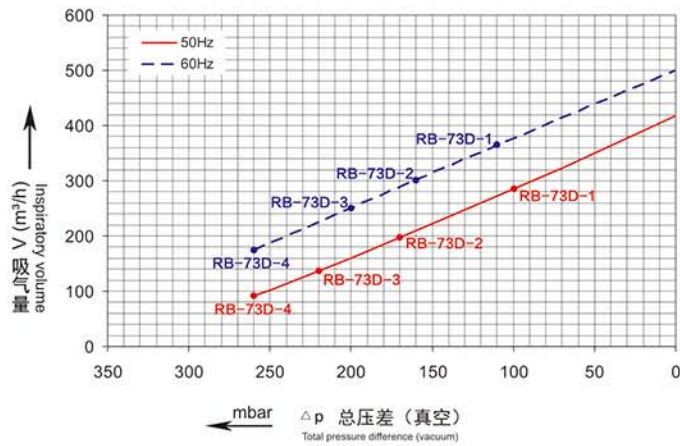


真空性能曲线

Vacuum performance curve

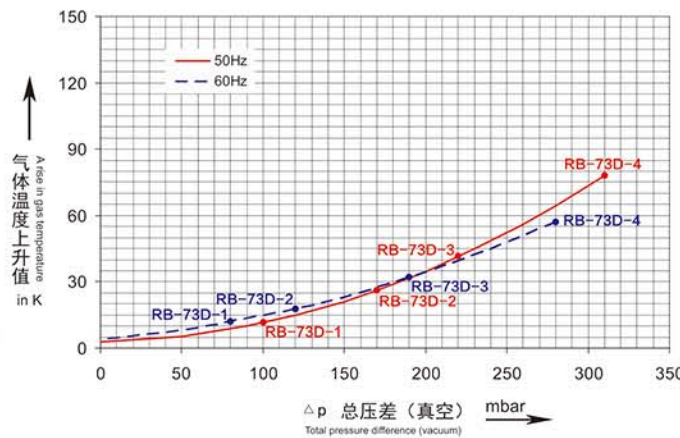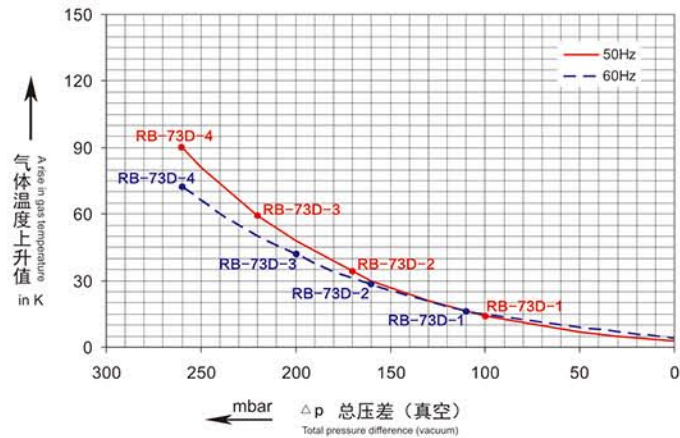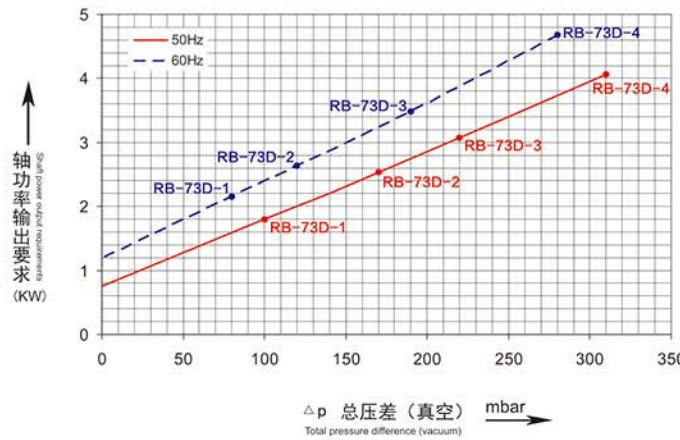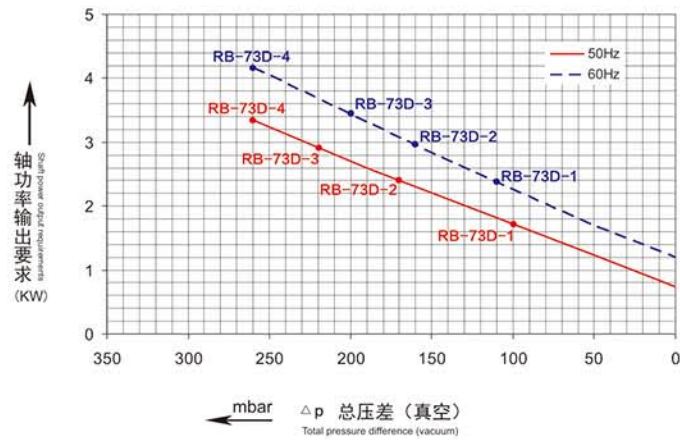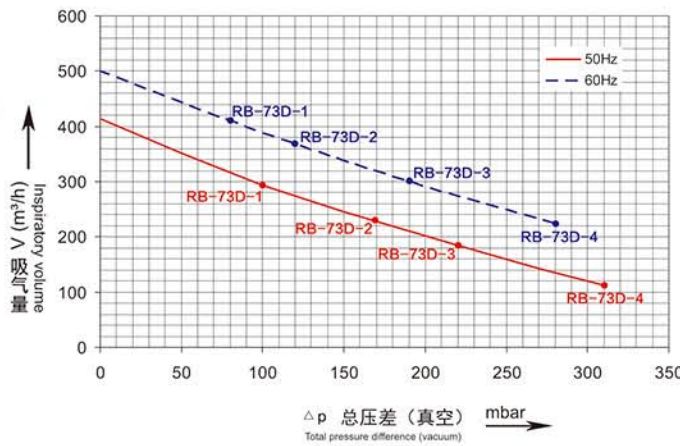


RB(YX)-81D(HB-729)

型号	频率	功率	额定电压	电流	最大流量	额定真空	额定压力	噪音	重量	进出口径
Type	Frequency	Power	Rated Voltage	Rated Current	Air Flow (max)	Rated Vacuum	Rated Pressure	Noise Level	Weight	In/out
	Hz	Kw	V	A	m³/h	mbar	mbar	dB(A)	Kg	Let
RB-81D-1	50	4.3	345-415△ 600-720Y	9.5△/5.5Y	530	-200	200	80	60	PF 2.5"
	60	4.8	380-480△ 660-720Y	9.5△/5.5Y	620	-220	220	82		
RB-81D-2	50	5.5	345-415△ 600-720Y	12.9△/7.4Y	530	-300	320	80	65	PF 2.5"
	60	6.3	380-480△ 660-720Y	12.9△/7.45Y	620	-320	340	82		
RB-81D-3	50	7.5	345-415△ 600-720Y	16.7△/9.6Y	530	-320	380	80	68	PF 2.5"
	60	8.6	380-480△ 660-720Y	17.3△/10.0Y	620	-340	400	82		





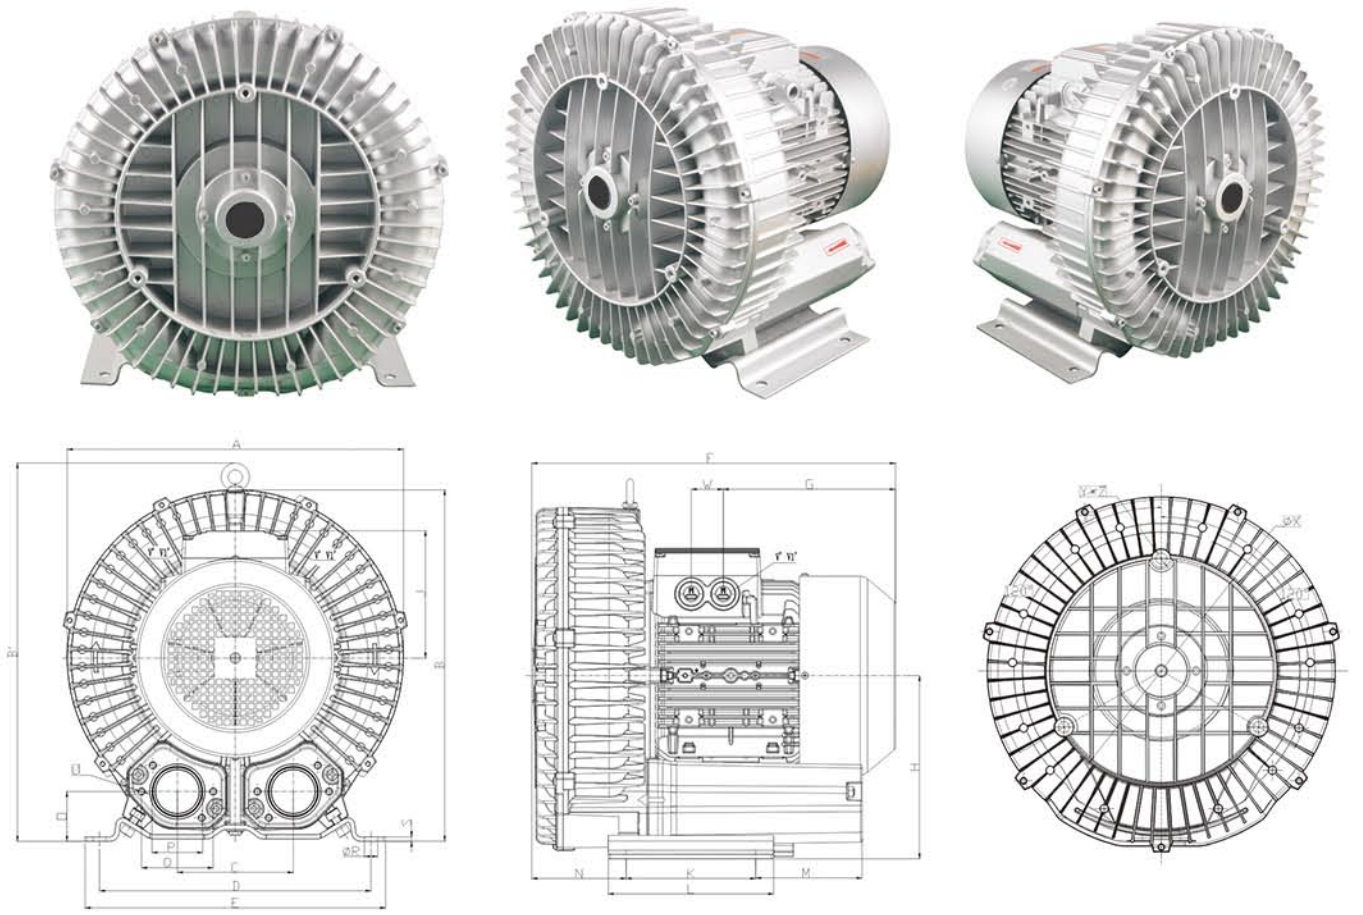


Type	Phases	A	A'	B	B'	C	D	E	F	F'	G	H	H'	J	K	L	M	N	N'	O	φP	φR	S	V	W	φX	YxZ	X-Bohrungen X-Holes
RB-81D-1	3~	451	-	461	509	152	356	394	433	450	230	240	-	148	170	217	140	124	-	65	G2 1/2	6	6	4xM32x1.5	42	286	M12x20	0"/120"/240"
RB-81D-2	3~	451	-	461	509	152	356	394	433	477	226	240	-	167	170	217	140	124	-	65	G2 1/2	6	6	4xM32x1.5	42	286	M12x20	0"/120"/240"
RB-81D-3	3~	451	-	461	509	152	356	394	433	477	226	240	-	167	170	217	140	124	-	65	G2 1/2	6	6	4xM32x1.5	42	286	M12x20	0"/120"/240"

压力性能曲线
Pressure performance curve

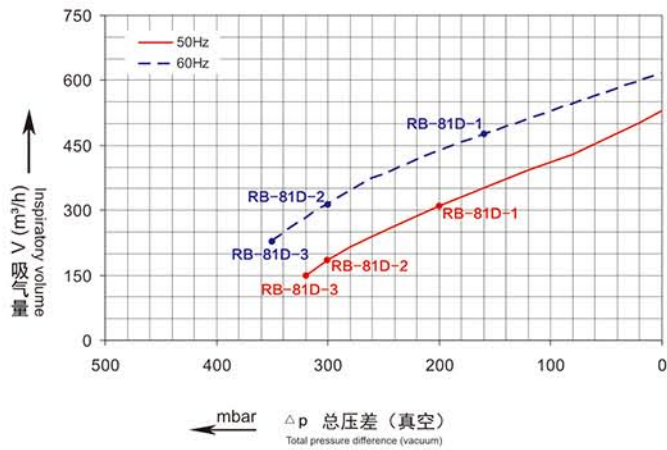


真空性能曲线
Vacuum performance curve

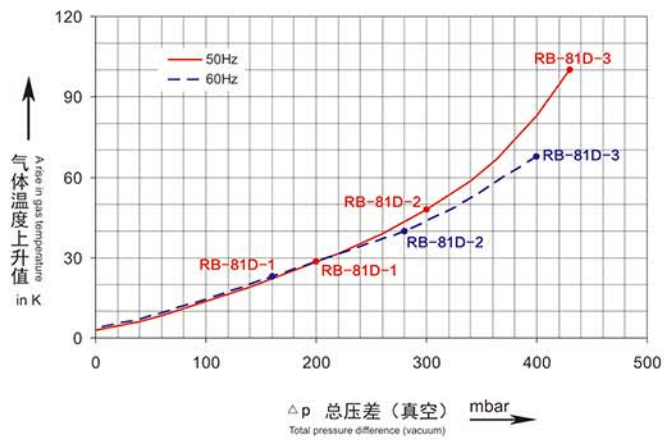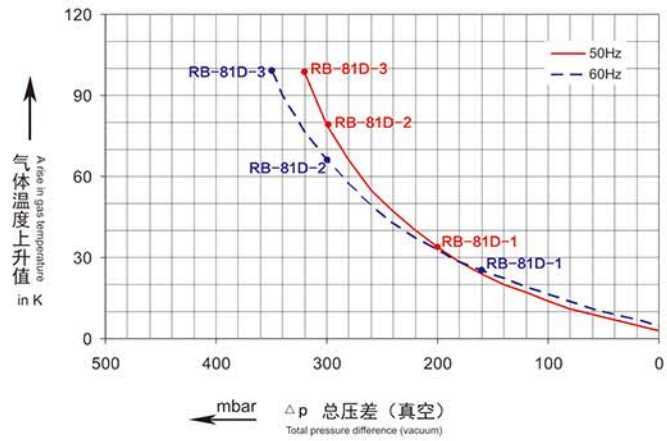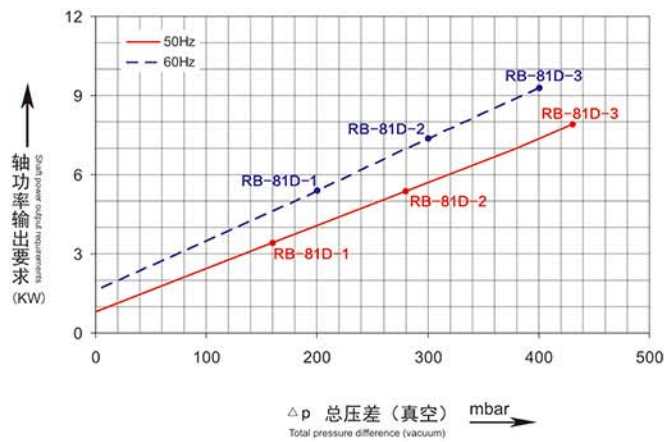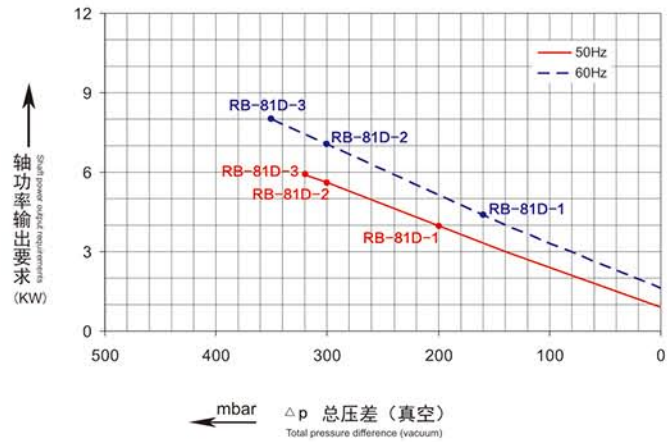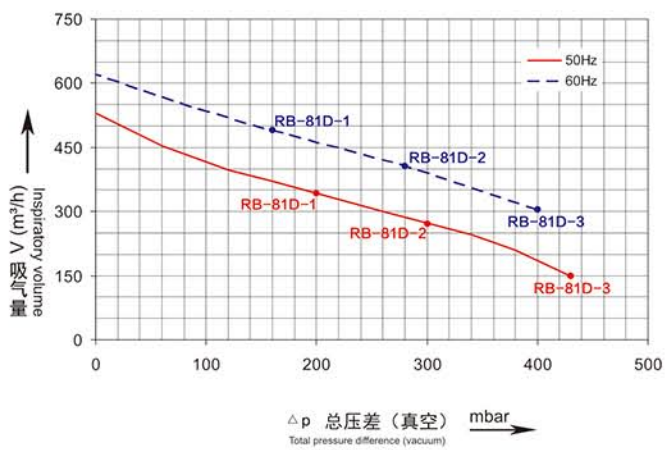


RB(YX)-83D

型号	频率	功率	额定电压	电流	最大流量	额定真空	额定压力	噪音	重量	进出口径
Type	Frequency	Power	Rated Voltage	Rated Current	Air Flow (max)	Rated Vacuum	Rated Pressure	Noise Level	Weight	In/out
	Hz	Kw	V	A	m³/h	mbar	mbar	dB(A)	Kg	Let
RB-83D-1	50	4	345-415△ 600-720Y	9.5△/5.5Y	700	-150	140	70	56	PF 2.5"
	60	4.6	380-480△ 660-720Y	9.5△/5.5Y	840	-90	90	74		
RB-83D-2	50	5.5	345-415△ 600-720Y	12.9△/7.4Y	700	-200	180	70	70	PF 2.5"
	60	6.3	380-480△ 660-720Y	12.9△/7.45Y	840	-180	180	74		
RB-83D-3	50	7.5	345-415△ 600-720Y	16.7△/9.6Y	700	-270	260	70	74	PF 2.5"
	60	8.6	380-480△ 660-720Y	17.3△/10.0Y	840	-270	260	74		

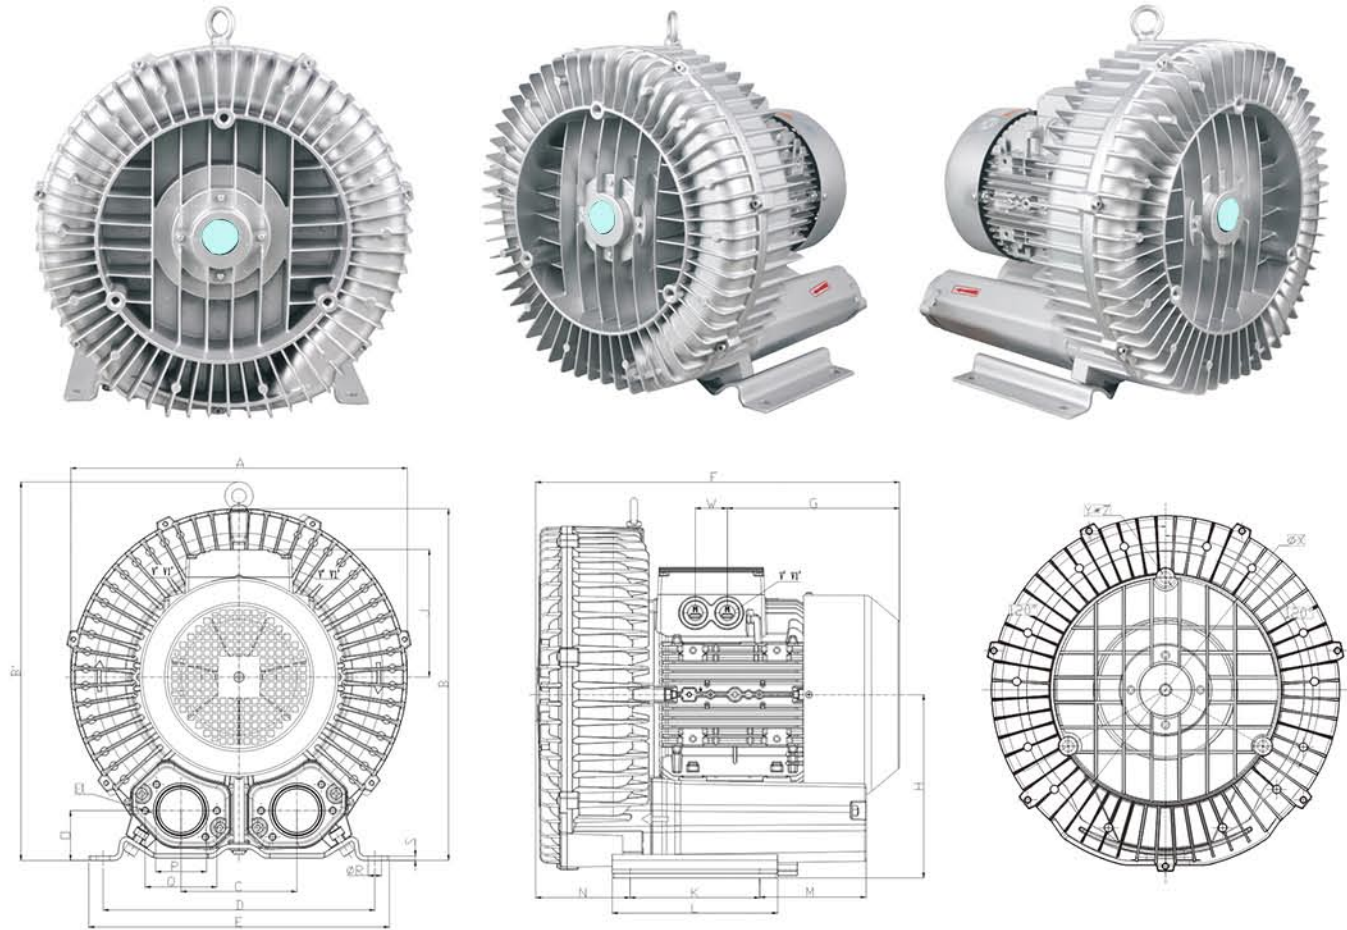


Type	Phases	A	A'	B	B'	C	D	E	F	F'	G	H	H'	J	K	L	M	N	N'	O	φP	φR	S	V	W	φX	YzZ	X-Bohrungen X-Holes
RB-83D-1	3~	451	-	461	509	152	356	394	449	466	230	240	-	148	170	217	139	164	-	65	G2 1/2	15	6	4xM32x1.5	42	286	M12x20	0°/120°/240°
RB-83D-2	3~	451	-	461	509	152	356	394	449	492	247	240	-	167	170	217	139	164	-	65	G2 1/2	15	6	4xM32x1.5	42	286	M12x20	0°/120°/240°
RB-83D-3	3~	451	-	461	509	152	356	394	449	492	247	240	-	167	170	217	139	164	-	65	G2 1/2	15	6	4xM32x1.5	42	286	M12x20	0°/120°/240°

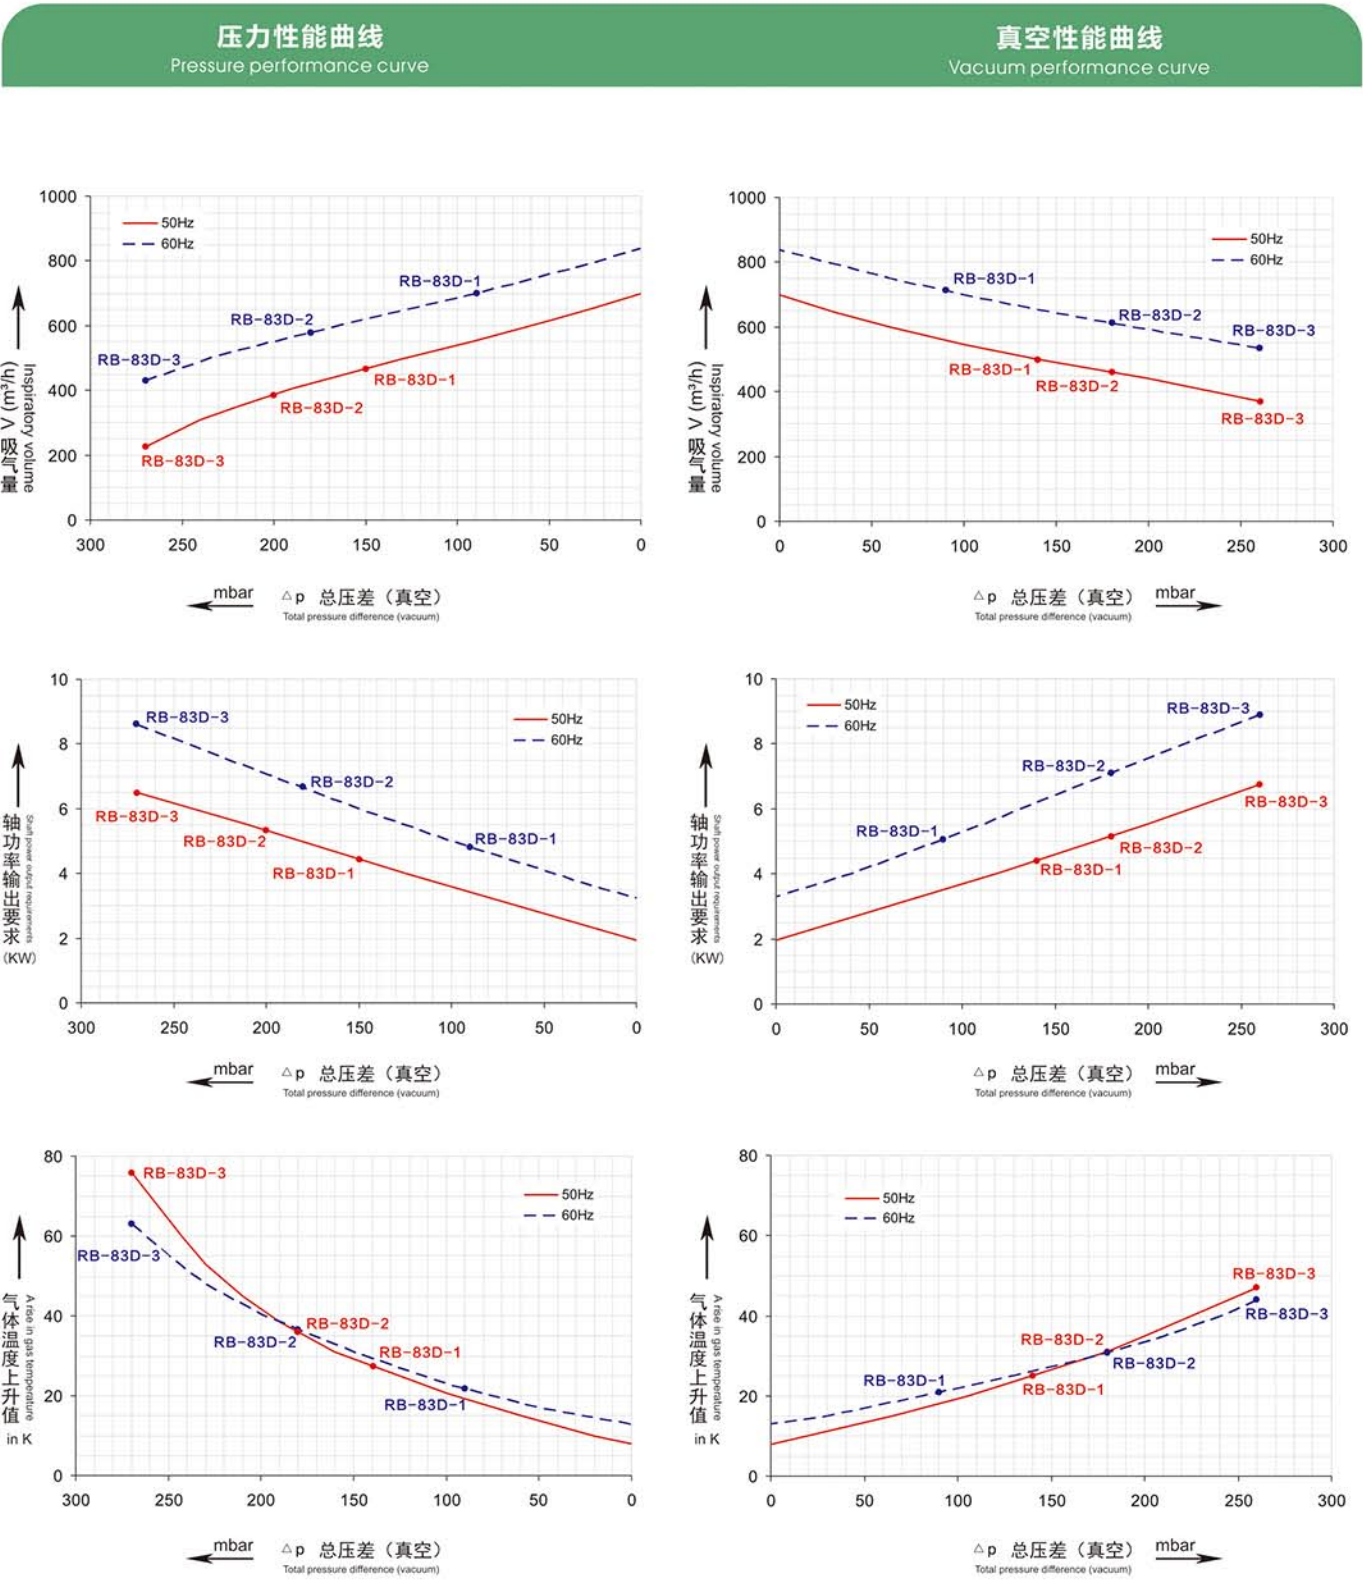

RB(YX)-83D

EXPLOSION-PROOF INDUSTRIAL BLOWER
防爆工业鼓风机

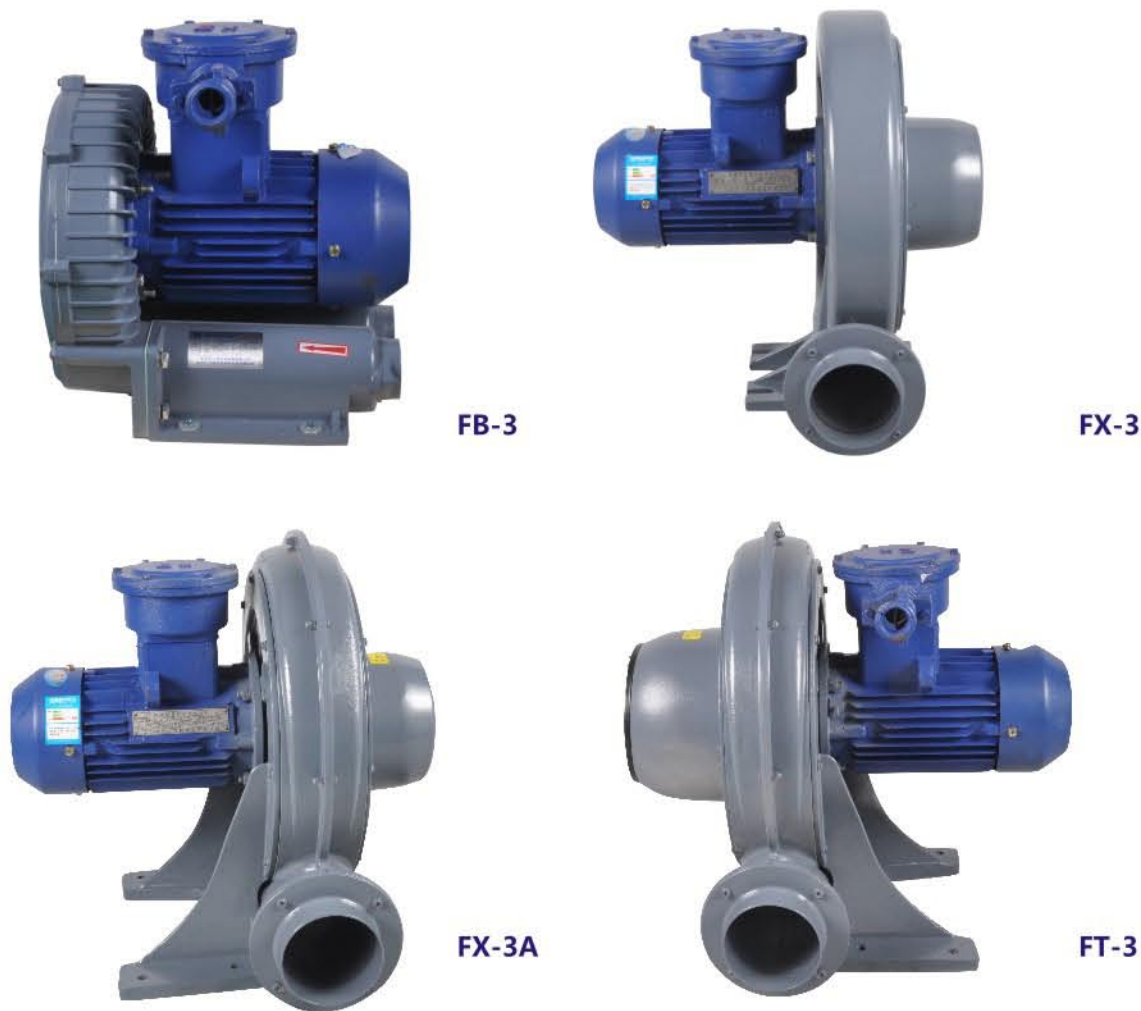

主要用于煤矿、石油爆炸性粉尘或可燃纤维、危险场合
危险等级：EX-DIIC>IIB>IIA

由于技术上的需要，本公司保留设计与变更的权利。安全事项：常温风机允许进风温度为40℃，以上型号均可做隔热(180℃)那腐蚀处理。由于高压系列风机可能在运行时产生温度达到100℃,故在选型及使用中涉及因温度升高而发生危险之场所避免使用。风机配置为：全铝机身风叶配备专业之防爆电机，电机防等级为IP55，绝缘等级F级，防爆等级最高DIICT4。

As a matter of technical necessity, the company reserves the right to design and change. Safety: the normal temperature fan allows the inlet air temperature is 40 DEG C, the above models can be made of insulation (180 C), the corrosion process, due to the high voltage series fan may cause the temperature reached 100 degrees at run time, so in the selection and use of related places risk due to temperature occurred to avoid the use of. Fan configuration: full aluminum fuselage, blade equipped with professional explosion-proof motor, motor grade is IP55, insulation class F, explosion-proof grade highest DIICT4.



FB-隔爆型环形鼓风机
FB- flameproof ring blower

型号	频率	功率	额定电压	额定电流	最大流量	额定真空	额定压力	噪音	出入口径
TYPE	Frequency	Power	Rated Voltage	Rated Current	Air Flow(max)	Rated Pressure	Rated Pressure	Noise Level	In/Out
	Hz	Kw	V	A	m³/min	Kpa	Kpa	dB(A)	Let
FB-1/2	50	0.37	380	0.96	1.3	-9	10	65	PF 1½"
	60	0.37			1.3	-10	12	68	
FB-1	50	0.75	380	1.73	2	-13	16	67	PF 1½"
	60	0.75			2.5	-14	15	72	
FB-2	50	1.5	380	3.3	3.2	-17	18	70	PF 2"
	60	1.5			4.5	-14	15	75	
FB-3	50	2.2	380	4.7	5	-20	20	70	PF 2"
	60	2.2			6	-15	15	78	
FB-5	50	3.0	380	8	6	-19	21	77	PF 2"
	60	3.0			7.5	-20	21	80	
FB-5	50	4.0	380	8	7	-22	24	77	PF 2"
	60	4.0			7.5	-22	21	80	
FB-7.5	50	5.5	380	10.9	10	-23	30	80	PF 2.5"
	60	5.5			11	-28	25	85	
FB-10	50	7.5	380	14.7	10	-21	23	80	PF 2.5"
	60	7.5			12	-19	19	85	
FB-15	50	11	380	24.5	19	-20	18	90	PF 4"
	60	11			24	-15	15	105	
FB-20	50	15	380	33	19	-26	24	90	PF 4"
	60	15			24	-20	20	105	
FB-25	50	18.5	380	40.2	19	-32	30	90	PF 4"
	60	18.5			24	-25	25	105	



注：FB防爆型环形鼓风机 泵壳和叶轮均为铝合金材质 防爆等级可选EX-DIIBT4 EX-DIICT4 F级绝缘等级 防护等级IP55 IP56 IP65等 可定制耐高温 防腐处理。





FB性能曲线表 PERFORMANCE CHART

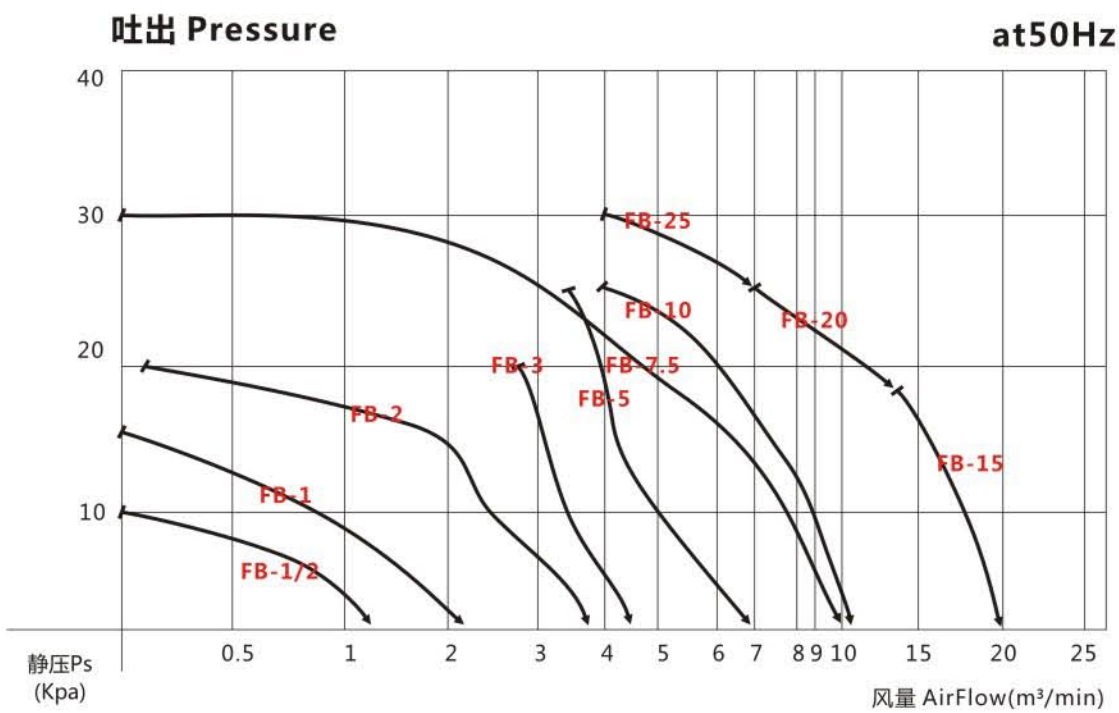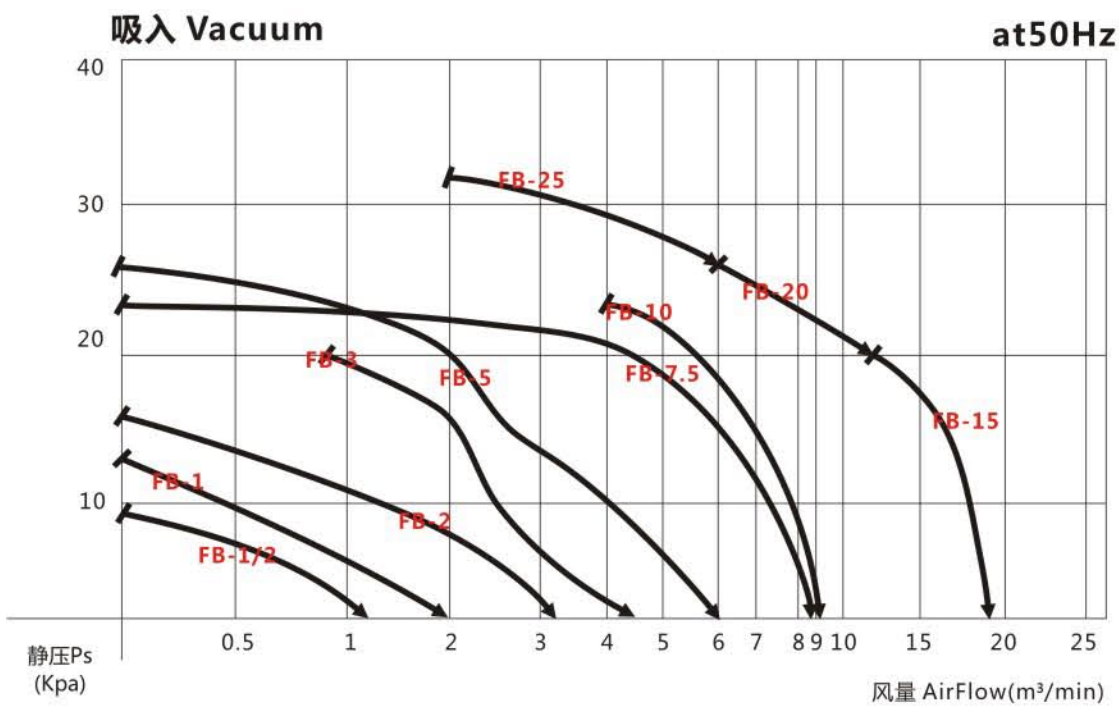




FB性能曲线表 PERFORMANCE CHART

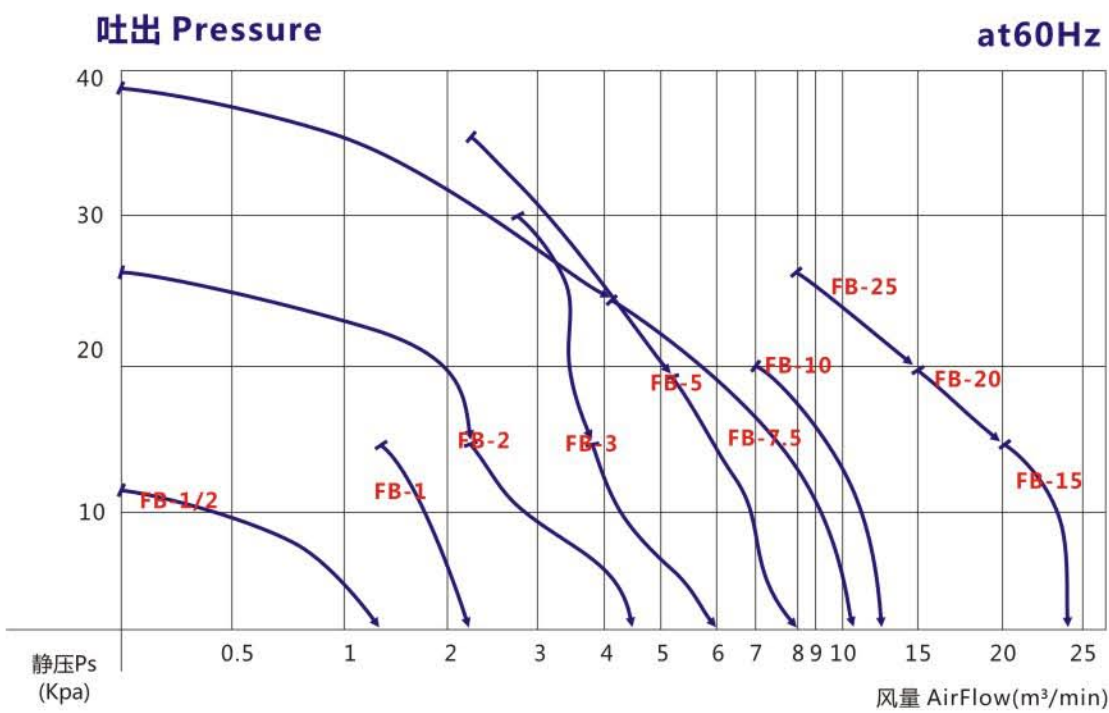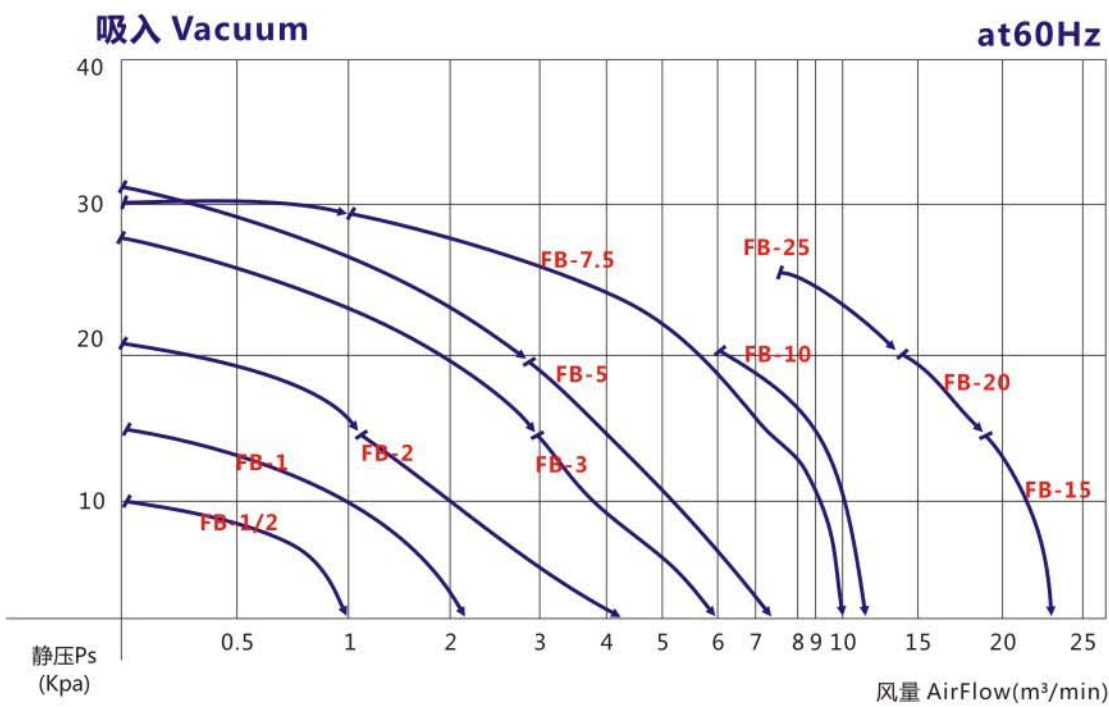




FB-H尺寸图 DIMENSION(MM)






FB-1/2




FB-1





FB-2






FB-3






FB-H尺寸图 DIMENSION(MM)






FB-5



FB-7.5



FB-10



FB-15
FB-20
FB-25

